IP Link® Device Interface Communication Sheet

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type:	Video Projector
Manufacturer:	Eiki
Firmware Version:	N/A
Model(s):	LC-XB100, LC-XB200

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
1	10/19/2009	1.4.0	3.0.1	Initial version.

Driver Notes:

Control Commands & States:

Aspect Ratio	Normal	Wide	
Audio Mute	On	Off	
Auto Image	Execute		
Freeze	On	Off	
Input	Computer 1	Computer 2	Video
Power Control	On	Off	
Video Mute	On	Off	
Volume (Step)	Up	Down	

Status Available:

Connection Status	Connected	Disconnected	
Device Status	Normal	Power Fail	Process Cooling Down (Abnormal Temperature)
	Standby after Cooling Down (Abnormal Temp)	Processing Power Save (Cooling Down)	Power Save
	Cooling Down (Lamp Failure)	Standby after Cooling Down (Lamp Failure)	Status Unavailable
Filter Usage	Hours		
Input	Computer 1	Computer 2	Video
Lamp Usage	Hours		
Power Control	On	Off	
Power Status	On	Off	Cooling Down
	Warming Up	Status Unavailable	

MLC62 Supported Commands:

Aspect Ratio	Normal	Wide	
Audio Mute	On	Off	
Auto Image	Execute		
Freeze	On	Off	
Input	Computer 1	Computer 2	Video
Power Control	On	Off	
Video Mute	On	Off	
Volume (Step)	Up	Down	

IP Link® Device Interface Communication Sheet

Cable and Adapter Requirements:

F/F RS-232C Null Modem Serial Cable

Notes for the Device:

Serial communication:

Port Type:	RS-232	**Parity:**	None
Baud Rate:	19200	**Stop Bits:**	1
Data Bits:	8	**Flow Control:**	None

Pin Assignments Diagram:

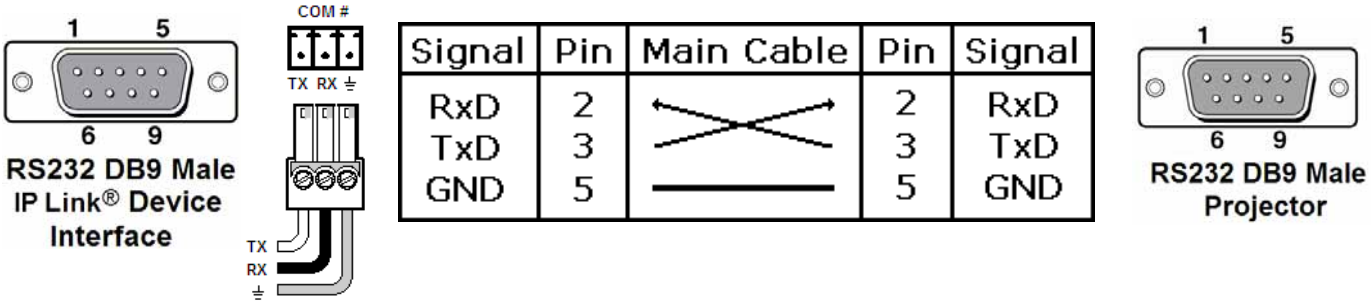

Note: Captive screw connector may also be used as a serial connection.

General Notes: